

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number  
**WO 03/084002 A1**

(51) International Patent Classification<sup>7</sup>: **H01R 13/658**

(21) International Application Number: PCT/US03/09009

(22) International Filing Date: 26 March 2003 (26.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002/16337 26 March 2002 (26.03.2002) KR

(71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**


- with international search report
- with amended claims

(72) Inventor; and  
(75) Inventor/Applicant (for US only): **KIM, Jung-Hoon** [KR/KR]; \* (KR).

(74) Agent: **PAULIUS, Thomas, D.**; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HIGH-SPEED CABLE CONNECTOR WITH STACKING STRUCTURE

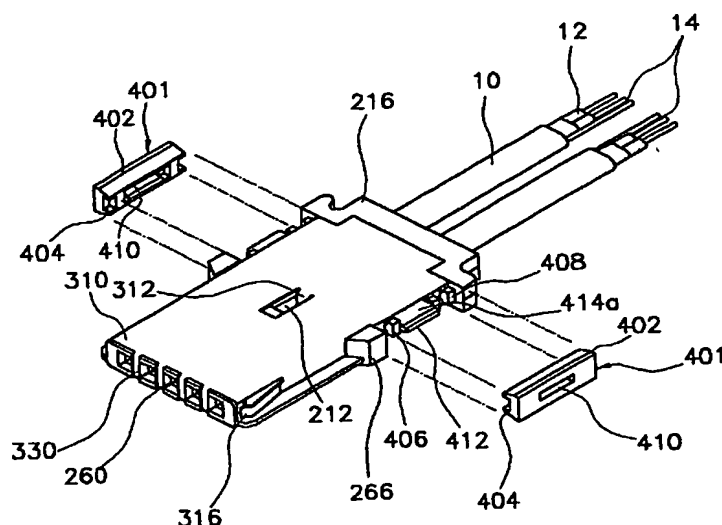

(57) **Abstract:** A connector assembly lamination for high-speed communication cables comprises at least two connector assemblies and a stacking construction. The stacking construction comprises: stacking protuberances protruding in lateral directions from both sides of the housing; shell wings protruding in lateral directions from both sides of each of upper and lower plates of the grounding shell, being bent downward and outward, and being attached to upper and lower surfaces of the stacking protuberances; and at least one stacking member, which is assembled with each side of the housing and includes at least two clamps attached to each other, each of the clamps having a clamp hole and at least one separation surface, the clamp hole extending in a horizontal direction, the stacking protuberances and the shell wings are inserted in the clamp hole, separation surfaces of the clamps being attached to each other to form the stacking member. The connector assembly lamination enables connector assemblies to be easily stacked on, assembled with, and separated from each other to improve the manufacturing process.

WO 03/084002 A1